

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
17 July 2003 (17.07.2003)


PCT

(10) International Publication Number  
**WO 03/058008 A1**

- (51) International Patent Classification<sup>7</sup>: **E04G 17/14** (74) Agents: **ROSE, Ian et al.**; Pipers Patent and Trade Mark Attorneys, Lvl 18, 500 Collins Street, Melbourne, Victoria 3001 (AU).
- (21) International Application Number: **PCT/AU03/00011**
- (22) International Filing Date: **8 January 2003 (08.01.2003)** (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
PR 9849 8 January 2002 (08.01.2002) AU
- (71) Applicant (*for all designated States except US*): **NICOLO, Assunta** [AU/AU]; 2 Brooklyn Avenue, Brooklyn Park, South Australia 5032 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **BRENNAN, James, Andrew** [NZ/NZ]; P.O. Box 9750, New Market, 1031 Auckland (NZ).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **METHOD AND APPARATUS FOR FORMING CONSTRUCTION PANELS AND STRUCTURES**

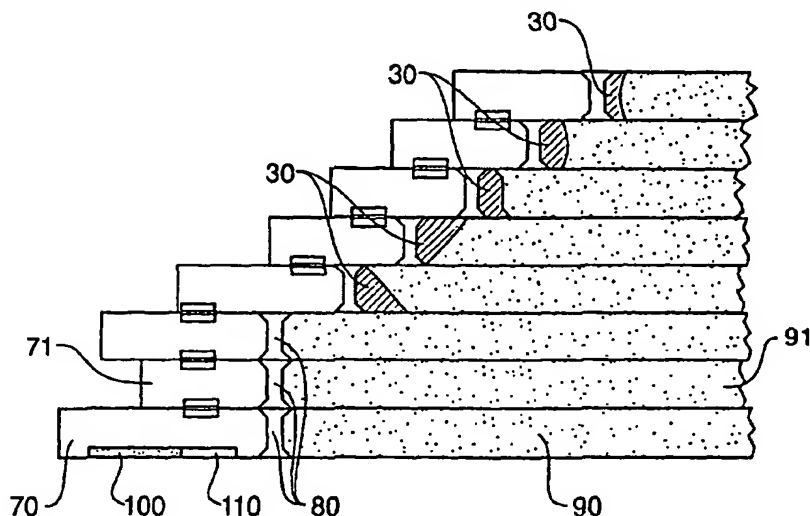

(57) Abstract: The present invention includes a formwork structure located on supporting surface, the structure having a side form perimeter including side form members, the perimeter defining a curable non-solid material retaining area; the formwork including side form support members that support the side form members, at least one of the side form support members being held in a fixed position relative to the supporting surface by a surface-to-member releasable securing device fixed to the supporting surface and which engages the side form support member, characterised in that the secured side form support member is adapted to permit another side form support member to be secured thereto by one or more releasable inter-member securing devices, which are separate to the surface-to-member securing device.

WO 03/058008 A1